

# **TECHNICAL INFORMATION**

## **C-RAIL**

---




---

Information in this document is subject to change. Owing to continued product development, Rollco reserves the right to make alterations without prior notice. Every care has been taken to ensure the accuracy of the information, but no liability can be accepted for any errors or omissions.

All information and content included in this document, such as text, and images, are property of Rollco. Any reproduction, even partial, is allowed only by written permission by Rollco.

## Product overview

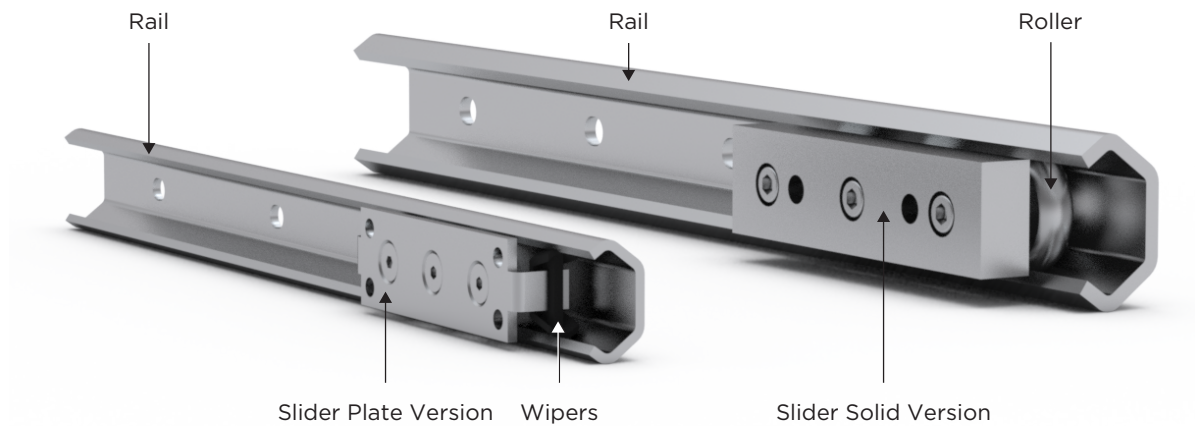

Rollco C-Rail compact and quiet linear guide with low friction. The system is suitable for applications in dusty environments where precision is not the main factor. It is a simple and cost-effective linear bearing. The stainless steel version is perfect for applications where corrosion resistance is important.

C-Rail has internal raceways to guarantee the best level of protection against impurities, debris and external abuse. The sliders have three radial ball bearings with double rubber seals and are lubricated for life. These rollers have eccentric pivots that allow adjusting the preload when mounted inside the rail.

C-Rail is available in zinc plated or in stainless steel AISI304 version. For AISI316, please contact Rollco. Rollers are available in stainless steel AISI440C. The stainless steel version (SXTE) is ideal for applications where water, temperature fluctuations or high temperatures occur.

The system is available in three different sizes, 20, 30 and 45. The rails are available in lengths up to 6 m.

## Application areas

- Food industry: production and packing of food/beverages
- Chemical and environment industry: water treatment devices
- Medical industry: analysis equipment
- Transport industry: sliding doors and boat constructions
- Power industry: boilers and house fireplaces
- Mechanical devices: car wash and automatic gates
- Machine tools: protective panel movement

## Technical data

- Max. temperature: 100°C (212°F)
- Speed: 1.5 m/s

## Stainless steel version characteristics

- Corrosion resistant even after scratching, etching and chipping
- Can be used in washdowns
- Resistant to high temperatures and temperature changes
- No coatings that could flake or chip
- Low coefficient of friction
- Ecological and recyclable materials

**For specifications and other technical data, please see the C-Rail product range on our website.**

# Mounted Rail and Slider

SXTE30 - 2 - LXWL30-88-2RS - 1040 - 20 - 20

**Rail type**

SXTE (Stainless steel)  
SBTE (Standard zinc plated steel) **Only available in size 45!**

**Size**

20, 30 or 45

**No. of sliders on each rail**

**Slider type**

LSWL (Stainless steel body with wipers and standard steel rollers)  
LXWL (Stainless steel body with wipers and stainless steel rollers)  
LSBE (Stainless steel body and standard steel rollers)  
LXBE (Stainless steel body and stainless steel rollers)

**Slider size**

**Slider body length**

Plate version: 80, 88, 150. Solid version: 60, 80, 120

**Roller protection shield type**

2Z (Steel cover disc)  
2RS (Splash-proof rubber seal)

**Length of rail**

**Distance from end of rail to center of first hole**

**Distance from center of last hole to rail end**

# Slider

LXWL30 - 80 - 2RS

**Slider type**

LSWL (Stainless steel body with wipers and standard steel rollers)  
LXWL (Stainless steel body with wipers and stainless steel rollers)  
LSBE (Stainless steel body and standard steel rollers)  
LXBE (Stainless steel body and stainless steel rollers)

**Size**

20, 30 or 45

**Slider body length**

Plate version: 80, 88, 150. Solid version: 60, 80, 120

**Roller protection shield type**

2Z (Steel cover disc)  
2RS (Splash-proof rubber seal)

# Roller

RXBLA45 - 2RS

**Roller type**

RSBLN (Concentric roller for plate version slider, standard bearing steel)  
 RXBLN (Concentric roller for plate version slider, stainless bearing steel)  
 RSBLA (Eccentric roller for plate version slider, standard bearing steel)  
 RXBLA (Eccentric roller for plate version slider, stainless bearing steel)  
 RSBN (Concentric roller for solid version slider, standard bearing steel)  
 RXBN (Concentric roller for solid version slider, stainless steel)  
 RSBA (Eccentric roller for solid version slider, standard bearing steel)  
 RXBA (Eccentric roller for solid version slider, stainless bearing steel)

**Size**

20, 30 or 45

**Roller protection shield type**

2Z (Steel cover disc)  
 2RS (Splash-proof rubber seal)

# Rail

SXTE45 - 1040 - 20 - 20

**Rail type**

SXTE (Stainless Steel)  
 SBTE (Standard zinc plated steel) **Only available in size 45!**

**Size**

20, 30 or 45

**Length of rail**

**Distance from end of rail to center of first hole**

**Distance from center of last hole to rail end**

**ALWAYS THE RIGHT  
SOLUTION AT THE RIGHT TIME.**

**ROLLCO**

LINEAR SOLUTIONS **YOUR WAY**

With reliability, competence and commitment Rollco rapidly delivers the right solutions and components to create safe and cost-effective automation and linear movement.

**Rollco AB**

Box 22234  
Ekvändan 3  
250 24 Helsingborg  
Sweden  
Tel. +46 42 15 00 40  
[www.rollco.se](http://www.rollco.se)

**Rollco A/S**

Skomagervej 13 E  
7100 Vejle  
Denmark  
Tel. +45 75 52 26 66  
[www.rollco.dk](http://www.rollco.dk)

**Rollco Oy**

Sarankulmankatu 12  
33900 Tampere  
Finland  
Tel. +358 207 57 97 90  
[www.rollco.fi](http://www.rollco.fi)

**Rollco Norge AS**

Industrigata 6  
3414 Lierstrada  
Norway  
Tel. +47 32 84 00 34  
[www.rollco.no](http://www.rollco.no)

**Rollco Taiwan**

No. 28, Lane 125, Da-an Road  
Shulin District 238  
New Taipei City, Taiwan  
Tel. +886-2-8687-2726  
Fax +886-2-8687-2720  
[www.rollco-tw.com](http://www.rollco-tw.com)